




**SINGLE-ARM LIGHT STANDARD**

TYPE MTLT\MTLS (MH) SA (AL)

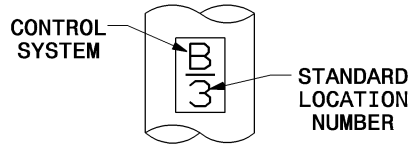

**DETAIL "I"**

3" HIGH CHARACTERS  
WITH 3/8" THICK LINES

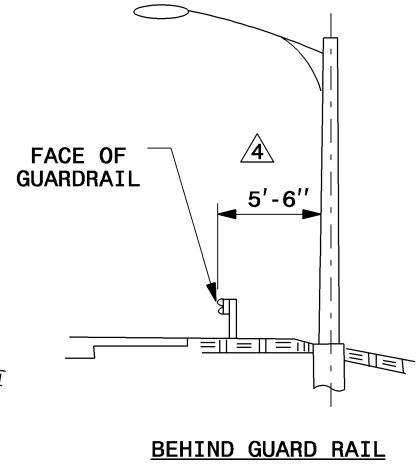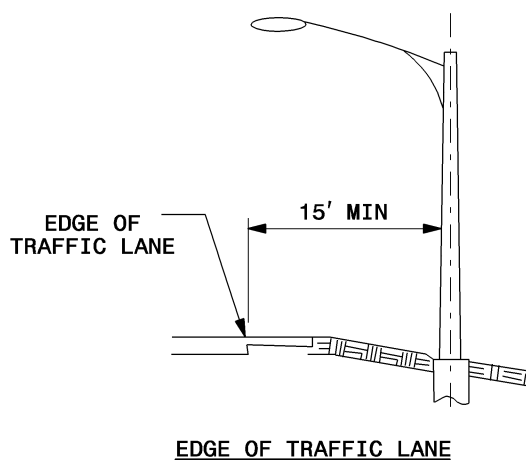

**STANDARD PLACEMENT**

**NOTES**

- 1 TRANSFORMER BASE SHOWN. OTHER BASES MEETING AASHTO BREAKAWAY REQUIREMENTS MAY BE PROVIDED IF APPROVED BY THE ENGINEER. SEE "BASE DETAILS" ON SHEET 2 OF 3.
- 2 SINGLE-MEMBER ARMS MAY BE PROVIDED IN LIEU OF TRUSS ARMS, WHEN SPECIFIED ARM LENGTH IS 8' OR LESS AND MOUNTING HEIGHT IS 35' OR LESS.
- 3 MOUNTING HEIGHT INCLUDES BREAKAWAY BASE FOR LIGHT STANDARDS WITH TRANSFORMER BASES. SEE "BASE DETAILS" ON SHEET 2 OF 3.
- 4 STANDARD PLACEMENT MAY BE REDUCED TO 3'-6" BEHIND FACE OF GUARDRAIL WHEN POSTS ARE SPACED 3'-1 1/2", OR WHERE SPEED LIMIT IS LESS THAN 55 MPH.
- 5 INSERT MOUNTING HEIGHT (MH) AND ARM LENGTH (AL) FROM PAY ITEM DESCRIPTION TO DETERMINE PROPOSED SINGLE-ARM LIGHT STANDARDS.
- 6 LIGHT STANDARDS MOUNTED ON BRIDGE OUTRIGGERS OR BEHIND RETAINING/BARRIER WALLS DO NOT REQUIRE BREAKAWAY BASES.